



QUANTUM REHAB®
Litestream
Order Form **XF**



MEDmobility

5711- Calgary Trail NW
Edmonton AB T6H 2K1
P: 780-437-3300
F: 780-430-9381
www.medmobility.ca

FOR AADL USE ONLY

Quantum Rehab®

A Division of Pride Mobility Products Corporation®
5096 South Service Rd., Beamsville, Ontario, L0R 1B3
Phone: (888) 570-1113 • Fax: (866) 514-1303

*Please always use www.pridemobility.com
to access the most current version of this form.

Account Number: _____

Provider Name: _____

Contact Name: _____

Phone #: _____

Fax #: _____

E-mail Address: _____

Date: _____

PO#: _____

Marked For: _____

Discount/Terms: _____

Ship To: _____

Address: _____

City: _____

Province: _____ Postal Code: _____

Tail Gate Needed: Yes No

Taken By: _____



BASE FRAME

Litestream XF \$2,410
-STF heights of 15"-19.5"
-Weight Capacity: 250 lbs.



Litestream XF Ultra Hemi \$2,410
-STF heights of 12.5"-16.5"
-Weight Capacity: 250 lbs.
CLINICAL JUSTIFICATION REQUIRED



Litestream HD \$2,990
-STF heights of 16"-19.5"
-Weight Capacity: 350 lbs.
-Available with 18-22' width only
CLINICAL JUSTIFICATION REQUIRED



COLOUR OPTIONS

Standard Colours:

Black Abyss

Blue Sky

SEAT SIZE		SIDE FRAME LENGTH		SEAT-TO-FLOOR				AXLE PLATE	
Width:	Depth:	Length:	Front Seat-to-Floor:	Rear Seat-to-Floor:		Axle Plates:			
<input type="checkbox"/> 14"	<input type="checkbox"/> 14"	<input type="checkbox"/> 16" (Available with 14"-16"D)	<input type="checkbox"/> 12.5"	<input type="checkbox"/> 17"	<input type="checkbox"/> 12.5"	<input type="checkbox"/> 17"	<input type="checkbox"/> Standard		
<input type="checkbox"/> 15"	<input type="checkbox"/> 15"	<input type="checkbox"/> 18" (Available with 14"-18"D)	<input type="checkbox"/> 13"	<input type="checkbox"/> 17.5"	<input type="checkbox"/> 13"	<input type="checkbox"/> 17.5"	<input type="checkbox"/> Amputee ¹		
<input type="checkbox"/> 16"	<input type="checkbox"/> 16"	<input type="checkbox"/> 20" (Available with 14"-20"D)	<input type="checkbox"/> 13.5"	<input type="checkbox"/> 18"	<input type="checkbox"/> 13.5"	<input type="checkbox"/> 18"			
<input type="checkbox"/> 17"	<input type="checkbox"/> 17"		<input type="checkbox"/> 14"	<input type="checkbox"/> 18.5"	<input type="checkbox"/> 14"	<input type="checkbox"/> 18.5"	Camber:		
<input type="checkbox"/> 18"	<input type="checkbox"/> 18"		<input type="checkbox"/> 14.5"	<input type="checkbox"/> 19"	<input type="checkbox"/> 14.5"	<input type="checkbox"/> 19"	<input type="checkbox"/> 0°		
<input type="checkbox"/> 19"	<input type="checkbox"/> 19"		<input type="checkbox"/> 15"	<input type="checkbox"/> 19.5"	<input type="checkbox"/> 15"		<input type="checkbox"/> 1.5° ¹		
<input type="checkbox"/> 20" \$105	<input type="checkbox"/> 20" \$105		<input type="checkbox"/> 15.5"		<input type="checkbox"/> 15.5"		<input type="checkbox"/> 3° ¹		
<input type="checkbox"/> 21" ² \$105			<input type="checkbox"/> 16"		<input type="checkbox"/> 16"				
<input type="checkbox"/> 22" ² \$265			<input type="checkbox"/> 16.5"		<input type="checkbox"/> 16.5"				


1 N/A w/ Litestream HD or transit Kits

2 Only available on Litestream HD

LITESTREAM SEAT-TO-FLOOR HEIGHTS WITH STEM EXTENSIONS

The front and rear seat-to-floor (STF) heights will change according to the stem extensions for the bolt-on caster forks. Maximum seat dump is 5.08 cm (2 in.). Refer to the following charts for the changes to STF and required rear wheel size options.

Caster Stem Extensions are N/A with Litestream HD

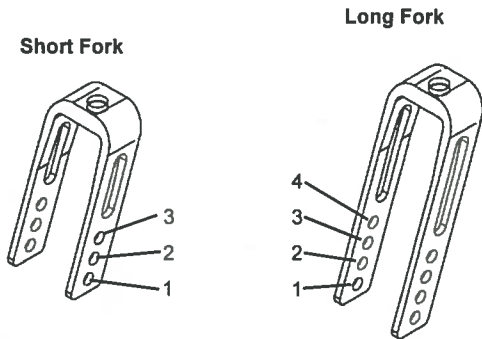

Front STF Chart							Rear STF Chart							
Front stem extension option							Rear wheel option required							
No Stem Extension							0.75		1.5					
Selected Front STF	Caster size				STF height after adding stem extension		Selected Rear STF	Rear wheel option required						
	4	5	6	8		20		22	24	25	26			
Hemi frame							Hemi Frame							
12.5	S2/U1					13.25	14	12.5	X					
13	S1/F3	S2/U1				13.75	14.5	13	X					
13.5	L3/F2	S1/L4				14.25	15	13.5	X	X				
14	L2/F1	L3/F2	S1/L4			14.75	15.5	14	X	X				
14.5	L1	L2/F1	L3			15.25	16	14.5	X	X	X			
15		L1	L2/F1			15.75	16.5	15	X	X	X	X		
15.5			L1			16.25	17	15.5	X	X	X	X	X	
16				L2		16.75	17.5	16	X	X	X	X	X	
16.5				L1		17.25	18	16.5		X	X	X	X	
Standard Frame							Standard Frame							
15	S3/U2					15.75	16.5	15	X	X	X	X	X	
15.5	S2/U1					16.25	17	15.5	X	X	X	X	X	
16	S1/F3	S2/U1				16.75	17.5	16	X	X	X	X	X	
16.5	L3/F2	S1/L4				17.25	18	16.5		X	X	X	X	
17	L2	L3	S1/L4			17.75	18.5	17		X	X	X	X	
17.5	L1	L2/F1	L3			18.25	19	17.5			X	X	X	
18		L1	L2/F1			18.75	19.5	18			X	X	X	
18.5			L1			19.25	20	18.5				X	X	
19				L2		19.75	20.5	19						X
19.5				L1		20.25	21							

S = Short Fork L = Long Fork F = Frog Legs U = Frog Legs w/ UNI-tine Fork
 The number next to the fork option indicated the hole location on the fork. Hole 1 is the bottom hole on the fork. See fork illustration for additional details.

ARMRESTS

Armrests:

Tubular Swing-Away 12" L¹ Std



Single Post Height Adjustable Arm (9"-14"H) \$315

Armpads

- Full Length, Straight
- Desk Length, Straight
- Full Length, Waterfall
- Desk Length, Waterfall

Height Adjustable Drop-ins (10"-14"H)² \$290

Armpads

- Full Length, Straight
- Desk Length, Straight
- Full Length, Waterfall
- Desk Length, Waterfall



Height Adjustable Dual Post, Flip-Back, Removable^{1,2} (10.5"-15.5"H) \$290

Armpads

- Full Length, Straight
- Desk Length, Straight



1 N/A with occupied transit Kit
 2 N/A with unilateral wheel locks

WHEEL LOCKS

Push-to-Lock¹



Push-to-Lock with Extension \$30



Pull-to-Lock¹



Pull-to-Lock with Extension \$30



HD Push-to-Lock



HD Push-to-Lock with Extension \$30



HD Pull-to-Lock



HD Pull-to-Lock with Extension \$30



Scissor Locks \$150
Not covered by AADL



Hill Holder (Grade Aids)² \$160



Unilateral Brake \$160

Left Right

Clinical Justification Required

¹ N/A with Amptee Axle Plates or Hill Holder
² N/A with Poly Tires

BACK CANES

8° Back Canes w/ Push Handles Std

- 12-16"H
- 15-19"H
- 18-22"H

Straight Back Canes

- 12-16"H
- 15-19"H
- w/ Push Handles
- w/o Push Handles

Angle Adjustable \$175

- 12-16"H
- 15-19"H
- 18-22"H
- w/ Push Handles
- w/o Push Handles

Straight Reinforced

- 15-19"H

Back Canes set at: _____ "H

Rigidizer Bar (For use with Litestream XF and XF Ultra Hemi 18-20"W) \$420 Not covered by AADL

Rigidizer Bar (For use with Litestream HD) Std

BACK OPTIONS

If no Back Option is selected, then "Omit Back" will be chosen for the chair

Padded Sling Back NC



Tension Adjustable Seat Back¹ \$125



HD Tension Adjustable Seat Back \$205



¹ N/A w/ Litestream HD

PUSH WHEEL OPTIONS

Axles:

- Quick Release
- Quad Release¹ \$160 Clinical Justification Required
- Bolt on NC

Composite Mags² (must pick Rim, Handrim and Tire):

Rims:

- 20" Rim
- 22" Rim
- 24" Rim



Handrims:

- Anodized Aluminum Handrim
- Vinyl Coated Handrim \$210
- Chrome Handrim
- 45° Oblique Projection Handrim \$310
- Vertical Projection Handrim \$310

Tires:

- Poly treaded Tire Dark Grey

Spinergy (must pick Rim, Handrim and Tire): Not covered by AADL

Rims:

- 20" Spinergy Wire Rim²
- 22" Spinergy Wire Rim
- 24" Spinergy Wire Rim
- 25" Spinergy Wire Rim
- 26" Spinergy Wire Rim



Handrims:

- Anodized Aluminum Handrim
- Vinyl Coated Handrim \$210
- 45° Oblique Projection Handrim \$310
- Vertical Projection Handrim \$310
- Natural Fit Standard Grip Handrim \$365
- Natural Fit Super Grip Handrim \$415

Tires:

- Poly treaded Tire Dark Grey¹
- Poly treaded Tire Light Grey (24" only)¹
- Pneumatic Tire w/ Tube
- Pneumatic Tire w/ Flat Free insert \$130
Not covered by AADL
- Knobby Tire w/ Tube \$100
Not covered by AADL
- Knobby Tire w/ Flat Free insert \$230
Not covered by AADL
- Primo 110PSI w/ Tube Not covered by AADL
 - Grey
 - Red \$100
 - Yellow \$100
 - Blue \$100
- Schwable Marathon Plus 145PSI \$240
 - Black
 - Grey

- Spinergy Lite Extreme Carbon Fiber Rim \$940




(must pick size and colour below) Not covered by AADL

- Spinergy Sport Lite Extreme Carbon Fiber Rim \$940

(must pick size and colour below) Not covered by AADL

- | | | |
|------------------------------|--------------------------------|---------------------------------|
| <input type="checkbox"/> 22" | <input type="checkbox"/> Blue | <input type="checkbox"/> Yellow |
| <input type="checkbox"/> 24" | <input type="checkbox"/> Black | <input type="checkbox"/> Green |
| <input type="checkbox"/> 25" | <input type="checkbox"/> White | <input type="checkbox"/> Pink |
| <input type="checkbox"/> 26" | <input type="checkbox"/> Red | <input type="checkbox"/> Orange |



One-Arm Drive:

- 24" Lightweight Quick-Release Wire Spoke Wheel w/ Aluminum Handrim and Pneumatic Tire \$1,150
 - Left Hand Drive
 - Right Hand Drive
- Not covered by AADL



1 N/A w/ Litestream HD

2.20" Spoke Wheels are N/A w/ Natural Fit Handrims

CASTER FORKS/WHEELS

Casters:

- Black Urethane Std
 - 4"
 - 5"
 - 6"
 - 8"
- Gray Pneumatic \$100
 - 8"



Forks:

- Bolt-on Std
 - Short
 - Long
 - 0.75" Longer Stem Bolt¹
 - 1.5" Longer Stem Bolt¹
- Quick Release NC
 - Short
 - Long
- Frog Legs Suspension \$475
Not covered by AADL
- 60mm (Required for 8" Pneumatic caster) NC



1 N/A w/ Litestream HD

FOOT RIGGINGS

Upper:

- 60° Swingaways \$235
- 70° Swingaways \$235
- 80° Swingaways^{1,2} \$235
- 90° Swingaways^{2,3} \$235
- Elevating Legrests w/ Standard Calf Pads⁴ \$415
- Elevating Legrests w/ Depth Adjustable Calf Pads \$415



Lower (refer to page for Maximum Leg Length Charts):

- Short
- Medium
- Long⁵

Footplates (refer to page 6 for Footplate Interference Charts):

- Flip-up Alum Footplate w/Heel Loop Std

Footplate Size:

- 6.5"x 6"⁶ 8"x 6"

- Comfort Adjustable Composite \$135

- 4.25" 5" 6"

- Heel Loops \$40



- Aluminum Angle Adjustable \$235

- 5.5" 6.5" 7.5"

- Heel Loops Std

- Omit Heel Loops (-\$40)

- Wheel Bumpers \$30 Not covers



Chair Width	Legrest	4.25" W (Narrow) Composite & 5.5" W Aluminum	5" W Composite & 6.5" W Aluminum	6" W Composite & 7.5" W Aluminum
14"	Straight	4.25" W Narrow Only	N/A	N/A
15"	Straight	ALL	N/A	N/A
16"	Straight	ALL	N/A	N/A
17"	Straight	ALL	ALL	N/A
18"	Straight	ALL	ALL	N/A
19"	Straight	ALL	ALL	ALL
20"	Straight	ALL	ALL	ALL
21"	Straight	ALL	ALL	ALL
22" (HD Only)	Straight	N/A	ALL	ALL

1 N/A w/ 8" casters

2 N/A w/ Litestream Ultra Hemi

3 Only available w/ 4" casters

4 N/A on 14" W Litestreams

5 N/A w/ Flip up Alum Footplates

6 16" W or smaller require smaller footplate

ACCESSORIES

- Adjustable Rear Anti-tip Wheels \$55



- Side Guards, Small Plastic Removable \$95



- Side Guards, Large Aluminum Removable \$135



- 60" Lap Belt \$45

- Tubular Gel Arm Covers \$140



- Case Logic under the Seat Organizer \$45



- Touch up Paint \$30

Not covered by AADL

Not covered by AADL

Not covered by AADL

- Tool Kit \$15
Not covered by AADL

- Cane/Crutch Holder \$100
Not covered by AADL



- Quantum Backpack \$65
Not covered by AADL



- Shoe Holder, Padded Buckle \$265

- Medium 4" x 8.25"

- X-Large 5" x 10.75"

TRANSIT KITS

- Unoccupied

- Occupied (n/a with Litestream Ultra Hemi or HD)

The Transit Securement Package, when used in conjunction with a wheelchair in the specific configuration of a 16"x16" seat size, with 15"-19" straight back canes, desk-length height-adjustable armrests, padded back sling upholstery, and 70-degree bi-directional legrests, conforms with the standard of ANSI/RESNA WC/Vol. 4, Section 19, for the purpose of enabling wheelchairs to be secured in certain types of motor vehicles. The Transit Securement Package, including manufacturer-installed front and rear securement brackets and pelvic belt anchoring brackets, has been crash tested in accordance with ANSI/RESNA WC/Vol. 4, Section 19, Frontal Impact Test, with a 168-lbs. (76.2 kg) surrogate occupant corresponding to a user weight range of 115 lbs. (52.16 kg) to 210 lbs. (95.25 kg). While the Transit Securement Package is compatible with additional seat sizes, optional components, and varied configurations, and provides designated securement points, Pride Mobility makes no claims that any other components or configurations have been tested beyond the above described ANSI/RESNA conforming configuration. Please refer to the *Transit Securement Package* supplement (part number INFMANU3659) for additional information.

MAXIMUM LEG LENGTH CHART FOR LITESTREAM XF/HD

STF		60 degree		70 degree		60"	70"
Front	Rear	A/A	C/A	A/A	C/A	Aluminum flip-up	
15	15	15.5	15.75	15	15	15.5	15.5
15	14.5	16.25	16.5	15.75	15.75	16.25	15.5
15	14	16.25	16.5	15.75	15.75	16.25	16.25
15	13.5	16.25	16.5	15.75	15.75	16.25	16.25
15	13	17	17.25	16.5	16.5	17	16.25
15	12.5	17	17.25	16.5	16.5	17	16.25
15.5	15.5	16.25	16.5	15.25	15.25	16.25	15.5
15.5	15	17	17.25	15.75	15.75	17	16.25
15.5	14.5	17	17.25	15.75	15.75	17	16.25
15.5	14	17	17.25	15.75	15.75	17	16.25
15.5	13.5	17.75	18	16.5	16.5	17.25	17
15.5	13	17.75	18	16.5	16.5	17.25	17
16	16	17	17.25	15.75	15.75	17	15.5
16	15.5	17.75	18	16.5	16.5	17.75	16.25
16	15	17.75	18	16.5	16.5	17.75	17
16	14.5	17.75	18	16.5	16.5	17.75	17
16	14	18.25	18.5	17.25	17.25	18.5	17.75
16	13.5	18.25	18.5	17.25	17.25	18.5	17.75
16.5	16.5	17.75	17.25	16.5	16.5	17.75	17
16.5	16	18.25	18.5	16.5	16.5	18.5	17
16.5	15.5	18.25	18.5	16.5	16.5	18.5	17
16.5	15	18.25	18.5	16.5	16.5	18.5	17
16.5	14.5	19	19.25	17.25	17.25	19.25	17.75
16.5	14	19	19.25	17.25	17.25	19.25	17.75
17	17	18.25	18.5	16.5	16.5	18.5	17
17	16.5	19	19.25	17.25	17.25	19.25	17.75
17	16	19	19.25	17.25	17.25	19.25	18.5
17	15.5	19	19.25	17.25	17.25	19.25	18.5
17	15	19.75	20	18	18	19.25	18.5
17	14.5	19.75	20	18	18	19.25	18.5
17.5	17.5	19	19.25	17.25	17.25	19.25	18.5
17.5	17	19.75	20	17.75	17.75	19.25	18.5
17.5	16.5	19.75	20	17.75	17.75	19.25	19.25
17.5	16	19.75	20	17.75	17.75	19.25	19.25
17.5	15.5	20.5	20.75	18.5	18.5	19.25	19.25
17.5	15	20.5	20.75	18.5	18.5	19.25	19.25
18	18	19.75	20	17.75	17.75	19.25	19.25
18	17.5	20.5	20.75	18.5	18.5	19.25	19.25
18	17	20.5	20.75	18.5	18.5	19.25	19.25
18	16.5	20.5	20.75	18.5	18.5	19.25	19.25
18	16	20.5	20.75	19.25	19.25	19.25	19.25
18	15.5	20.5	20.75	19.25	19.25	19.25	19.25
18.5	18.5	20.5	20.75	18.5	18.5	19.25	19.25
18.5	18	20.5	20.75	19.25	19.25	19.25	19.25
18.5	17.5	20.5	20.75	19.25	19.25	19.25	19.25
18.5	17	20.5	20.75	19.25	19.25	19.25	19.25
18.5	16.5	20.5	20.75	20	20	19.25	19.25
18.5	16	20.5	20.75	20	20	19.25	19.25
19	19	20.5	20.75	19.25	19.25	19.25	19.25
19	18.5	20.5	20.75	20	20	19.25	19.25
19	18	20.5	20.75	20	20	19.25	19.25
19	17.5	20.5	20.75	20	20	19.25	19.25
19	17	20.5	20.75	20.75	20.75	19.25	19.25
19	16.5	20.5	20.75	20.75	20.75	19.25	19.25
19.5	19	20.5	20.75	19.25	19.25	19.25	19.25
19.5	18.5	20.5	20.75	20	20	19.25	19.25
19.5	18	20.5	20.75	20	20	19.25	19.25
19.5	17.5	20.5	20.75	20	20	19.25	19.25
19.5	17	20.5	20.75	20.75	20.75	19.25	19.25

LOWER LEGREST EXTENSION LENGTHS (FOR ALL FRAMES EXCEPT HEMI)

Extension Range			
Footplate	Short	Medium	Long
Aluminum & Composite	12-15.5	14.5-18	17-21
Flip Up	13-16	15.5-19	N/A



The legrest extension length is measured from the top of the footplate at the extension tube to the top legrest hanger at the pivot cap screw.

Footnotes/Rules:

70 degree legrests with C/A footplate and 8" caster not available on leg rest length less than 16.25".

Long legrest extension for A/A and C/A footplates are not available on 60 degree hangers with front STF's less than 16"

Long legrest extension for A/A and C/A footplates are not available on 70 degree hangers with front STF's less than 17.5"

MAXIMUM LEG LENGTH CHART FOR LITESTREAM HEMI

STF		60 degree		70 degree		60°	70°
front	rear	A/A	C/A	A/A	C/A	Aluminum flip-up	
12.5	12.5	12.75	13	12.25	12.25	12.5	11.75
12.5	12	13.5	13.75	12.25	12.25	13.25	12.5
13	13	13.5	13.75	12.25	12.25	13.25	12.5
13	12.5	14.25	14.5	13	13	14	12.5
13	12	14.25	14.5	13	13	14	12.5
13.5	13.5	14.25	14.5	13	13	14	12.5
13.5	13	15	14.5	13.75	13.75	14.75	13.25
13.5	12.5	15	14.5	13.75	13.75	14.75	13.25
13.5	12	15	14.5	13.75	13.75	14.75	13.25
14	14	14.25	14.5	13.75	13.75	15.5	14
14	13.5	15	15.25	14.5	14.5	14.75	14
14	13	15	15.25	14.5	14.5	14.75	14.75
14	12.5	15	15.25	14.5	14.5	15.5	14.75
14	12	15.5	15.75	15.25	15.25	15.5	14.75
14	11.5	15.5	15.75	15.25	15.25	15.5	15.5
14.5	14.5	15.5	15.25	14.5	14.5	16.25	15.5
14.5	14	16.25	15.75	15.25	15.25	15.5	14.75
14.5	13.5	16.25	15.75	15.25	15.25	16.25	15.5
14.5	13	16.25	15.75	15.25	15.25	16.25	15.5
14.5	12.5	17	16.5	15.75	15.75	16.25	15.5
14.5	12	17	16.5	15.75	15.75	17	16.25
15	15	15.5	15.75	15	15	17	16.25
15	14.5	16.25	16.5	15.75	15.75	15.5	15.5
15	14	16.25	16.5	15.75	15.75	16.25	15.5
15	13.5	16.25	16.5	15.75	15.75	16.25	16.25
15	13	17	17.25	16.5	16.5	16.25	16.25
15	12.5	17	17.25	16.5	16.5	17	16.25
15.5	15.5	16.25	16.5	15.25	15.25	17	16.25
15.5	15	17	17.25	15.75	15.75	16.25	15.5
15.5	14.5	17	17.25	15.75	15.75	17	16.25
15.5	14	17	17.25	15.75	15.75	17	16.25
15.5	13.5	17.75	18	16.5	16.5	17	16.25
15.5	13	17.75	18	16.5	16.5	17.25	17
16	16	17	17.25	15.75	15.75	17.25	17
16	15.5	17.75	18	16.5	16.5	17	15.5
16	15	17.75	18	16.5	16.5	17.75	16.25
16	14.5	17.75	18	16.5	16.5	17.75	17
16	14	17.75	18	17.25	17.25	17.75	17
16	13.5	17.75	18	17.25	17.25	18.5	17.75
16.5	16.5	17.75	18	16.5	16.5	18.5	17.75
16.5	16	17.75	18	16.5	16.5	17.75	17
16.5	15.5	17.75	18	16.5	16.5	18.5	17
16.5	15	17.75	18	16.5	16.5	18.5	17
16.5	14.5	17.75	18	17.25	17.25	18.5	17
16.5	14	17.75	18	17.25	17.25	19.25	17.75

LOWER LEGREST EXTENSION LENGTHS (HEMI FRAME)

Footplate	Extension Range		
	Short	Medium	Long
Aluminum & Composite	12-15.5	14.5-18	17-21
Flip Up	13-16	15.5-19	N/A



The legrest extension length is measured from the top of the footplate at the extension tube to the top legrest hanger at the pivot cap screw.

Footnotes/Rules:

70 degree legrests with C/A footplate and 8" caster not available on leg rest length less than 16.25".

Medium legrest extension for A/A and C/A footplates are not available on 60 degree hangers with front STF's less than 13.5"

Medium legrest extension for A/A and C/A footplates are not available on 70 degree hangers with front STF's less than 15"

Long extensions are NA with Hemi Frame.