

GO GO[®]

LX WITH CTS SUSPENSION



Comfort-Trac Suspension



Features, Performance and Travel Ready

The Go-Go[®] LX with CTS (Comfort-Trac Suspension) brings a new level of performance features and value to travel mobility. Featuring CTS independent front and rear suspension, sleek style, feather-touch disassembly and standard lighting, the Go-Go LX with CTS Suspension is the most advanced travel product available.

MEDmobility

5711- Calgary Trail NW
Edmonton AB T6H 2K1
P: 780-437-3300
F: 780-430-9381
www.medmobility.ca




Go-Go[®] LX
with CTS Suspension
3-wheel



Go-Go[®] LX
with CTS Suspension
4-wheel

Pride[®]
Mobility Products Co.

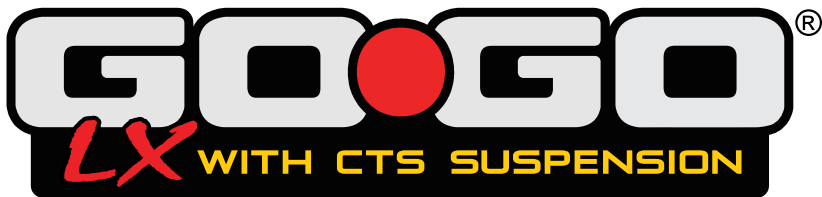

SPECIFICATIONS

Model number	S50LX (3-wheel) S54LX (4-wheel)
Max. weight capacity	300 lbs.
Maximum speed ¹	3-wheel: Up to 4.4 mph 4-wheel: Up to 4 mph
Ground clearance ²	1.5" at motor
Turning radius ²	3-wheel: 33.5" 4-wheel: 44.75"
Overall length ²	3-wheel: 39.75" 4-wheel: 41"
Overall width ²	20.5"
TIRES:	
Front	3-wheel: 2" x 8" solid 4-wheel: 2" x 7" solid
Rear	2.5" x 8" solid
Anti-tips	Rear
Standard seating	Foldable, compact, vinyl-covered molded plastic
Drivetrain	24-volt DC motor, sealed transaxle
Dual braking system	Regenerative and electromechanical
Battery charger	Off-board
Per-charge range ^{1,4}	3-wheel: Up to 9.44 miles 4-wheel: Up to 10.5 miles
Battery requirements ³	(2) 12V deep-cycle (standard)
Compatible batteries	17 AH

WEIGHT:

Batteries (2 required) ⁶	17 AH (30.4 lbs. battery pack)
Weight w/o battery pack	3-wheel: 85.4 lbs. 4-wheel: 87.4 lbs.
Heaviest piece	3-wheel: 34 lbs. (front section) 4-wheel: 36.6 lbs. (front section)

Interchangeable shroud panels



Red

Blue

¹Varies with user weight, terrain type, battery amp-hour (AH), battery charge, battery condition and tire condition.

This specification can be subject to a variance of (+ or -) 10% - 5%.

²Due to manufacturing tolerances and continued product improvement, this specification is subject to a variance of +/- 3%.

³AGM or gel cell type required.

⁴Tested in accordance with ANSI/RENSA, WC Vol 2, Section 4, and ISO 7176-4 standards. Results derived from theoretical calculations based on battery specifications and drive system performance. Test conducted at maximum weight capacity.

⁵Includes standard seat.


⁶Battery weight may vary based on manufacturer.

The information contained herein is correct at the time of publication. We reserve the right to alter specifications without prior notice.

FEATURES

- CTS (Comfort-Trac front and rear independent suspension)
- Feather-touch disassembly permits simple frame separation with only one hand
- Pride's exclusive black, non-scuffing tires
- Auto-connecting front-to-rear cable
- Includes 2 sets of easily changeable colored panels in Red and Blue
- Front frame-mounted seat post offers maximum stability
- All-new frame design easily disassembles into 5 super lightweight pieces for convenient transport and storage
- Modular design for easy serviceability
- Microprocessor-based controller offers optimal power management and added safety features
- Standard front tiller-mounted basket included
- Convenient off-board dual voltage charger can charge battery pack on-board or off-board
- Charger port in tiller

Pride® Lifts & Ramps

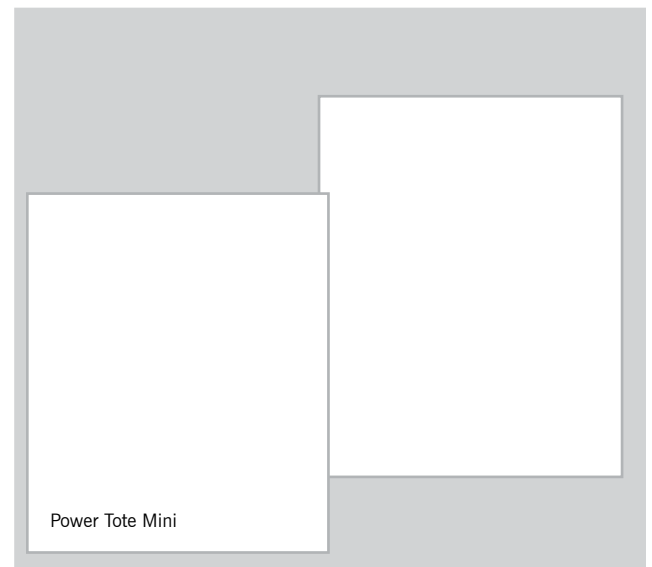

Power Tote Mini

MEDmobility

5711- Calgary Trail NW
Edmonton AB T6H 2K1

P: 780-437-3300

F: 780-430-9381

www.medmobility.ca



CA-GOLXCTS-11-14-13



Beamsville, Ontario • 888-570-1113 • www.pridemobility.com